
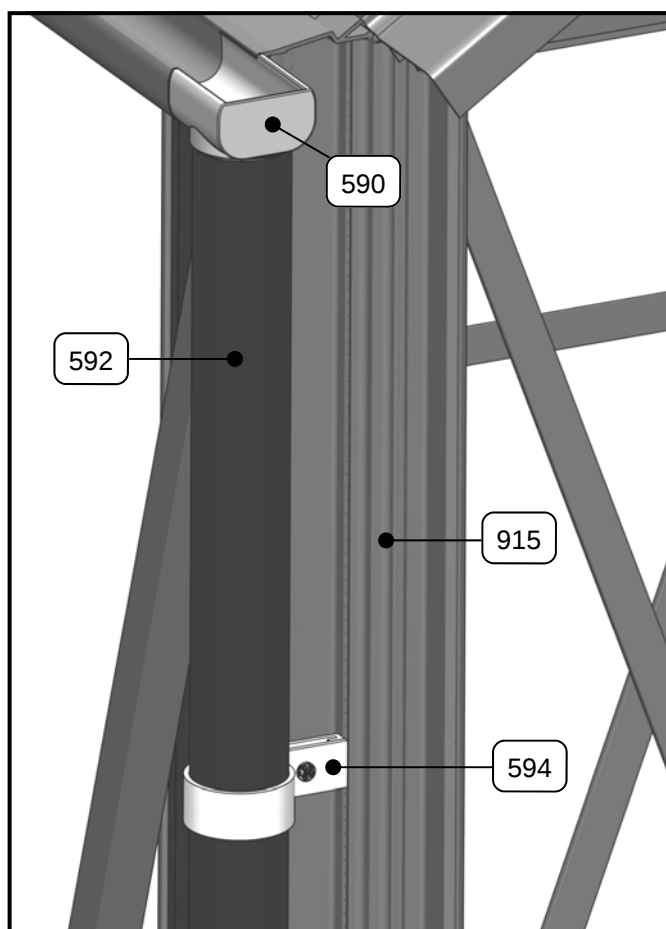
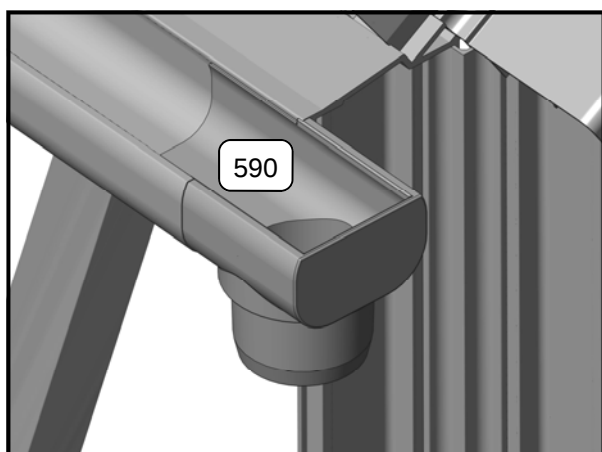


Downpipe Instillation

1. Firstly you need to decide which end you want your downpipe.
2. The gutter outlet and stop end simply push into the gutter. For an even better seal you could run a bead of silicone around the inside edge of the gutter before inserting the outlet and stop end.
3. Now take the downpipe and slide on the bracket. Insert the downpipe into the outlet.
4. When you are happy with its position line up the bracket with the side corner bar and attach it using one of the fixing options overleaf.
5. Finally push the 45 degree pipe (593) onto the end of the downpipe to direct the flow of water.




Part Name	Part No.	Length mm	Qty Required
Screws, self tapping - 19mm M3.5	583	19	1
Nut - M6	579	-	1
Bolt - M6	588	15	1
Gutter outlet	590	70	1
Gutter stop end	591	26	1
Downpipe	592	1500	1
45 degree double collar	593	-	1
Downpipe bracket	594	-	1

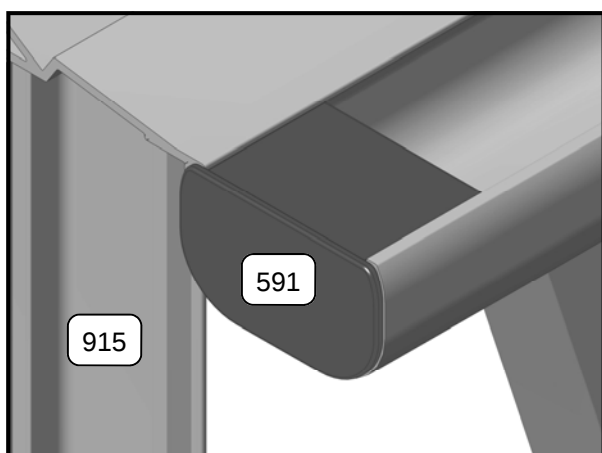

Downpipe Attachment

Choose one of the options for attaching your downpipes. It is entirely your preference, either method is as good as the other.

Option 1

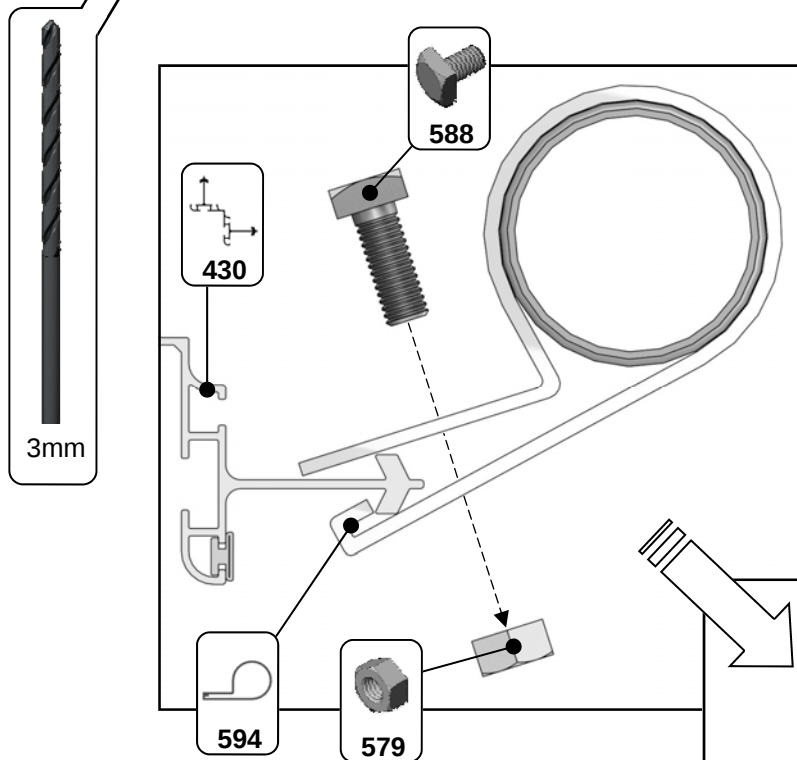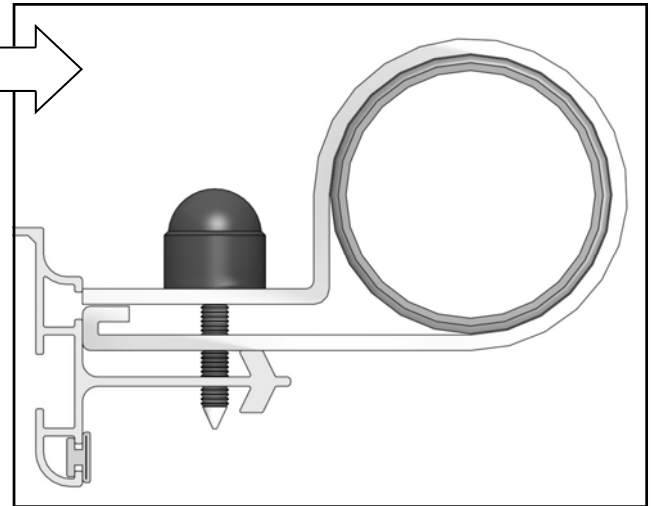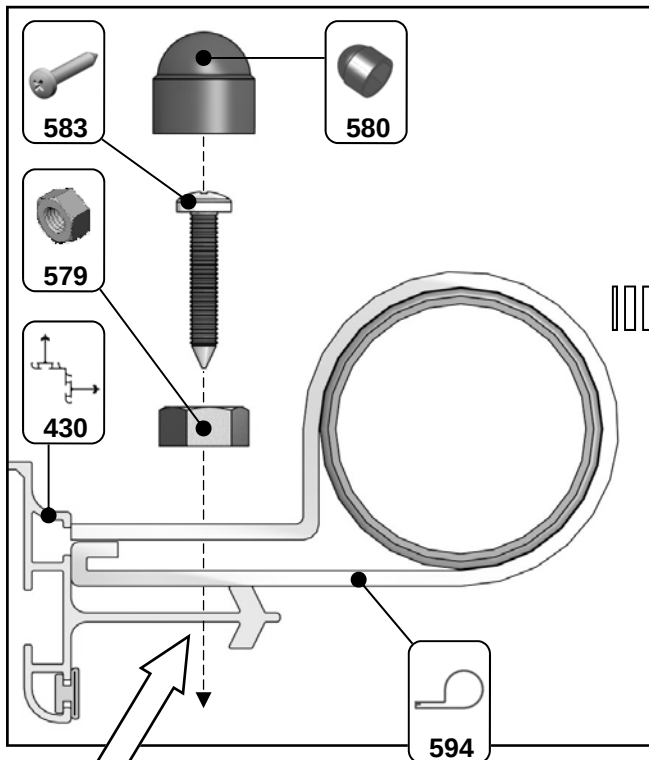

Option 2

